


# MATRIX F12



## Recommended daily usage

Up to 50 letters / day




## TECHNICAL DATA AND SPECIFICATIONS MATRIX F12

<b>Franking speed / Letter thickness</b>	Recommended for up to 50 letters a day / Letter thickness up to 10 mm.
<b>User interface</b>	Touchscreen monochrom display, 18 programmable OneTouch functions (quick access to postal products).
<b>Scales / Tariff calculation</b>	Online tariff service and downloads, scales 2 kg / 5 kg integrated, space-saving acrylic scale stand, separate interface for 30 kg scales (option), integrated single item weighing mode with Pop-Up weight display, tariff module with quick access to other postal products.
<b>Advertising</b>	Ink-jet printing technology with HQ high quality printing mode (600 dpi), linking of ad-slogans to accounts, 3 pre-programmed standard slogans (messages), 3 customer-specific ad-slogans (option), 2 self-programmable text messages additional to ad-slogans.
<b>Additional prints</b>	PPI (Printed Postage Impression), indicia print with or without flexible date, 1D-Barcode for postal services, incoming mail stamp function with date and time (without postage).
<b>Accounts</b>	9 password protected accounts, expandable up to 25 (option), report print-outs, 1 password protected admin mode.
<b>Interfaces</b>	IP communication technology (LAN, DHCP, Proxy), Ethernet RJ45 network connection, WLAN via WLAN-Bridge (option).
<b>SmartShop</b>	Integrated ordering of consumables online via Touchscreen (option).
<b>Comfort functions</b>	High value warning, automatic date and time change, multi-level energy saving modes with Soft-Off.
<b>Licences / Certificates</b>	FIPS 140-2 Level 3, IPMAR, CE, BSI-Grundschutz.
<b>Noise level</b>	Quiet in operation: LPA 1 m: 53 dB(A).
<b>Mains connection</b>	240 V / 50 Hz, off: 0.44 W, ready to frank: 5.5 W, in Operation: 15 W. Energy Star qualified

## Envelope format specification (mm)

Envelope dimensions:	height:	min:	95 mm
	width:	min:	143 mm
	thickness:	min:	0.1 mm
		max:	10 mm
Processible formats (DIN):		min:	C6 (162 mm x 114 mm)

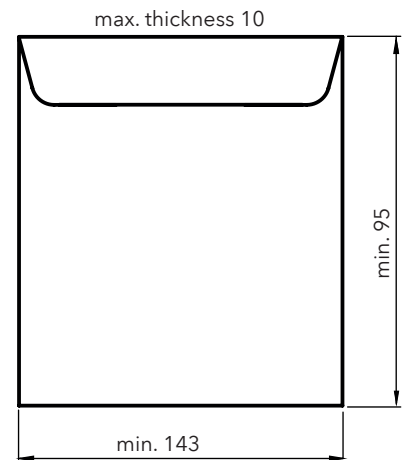

Frama AG Switzerland 1019317 R02.00 / 09.16  
Information provided are subject to change

## Dimensions (mm) and weight

Weight 4.3 kg (net)

