

MATRIX F22



Recommended daily usage

Up to 150 letters / day




TECHNICAL DATA AND SPECIFICATIONS MATRIX F22

Franking speed / Letter thickness	25 letters per minute / Letter thickness up to 10 mm.
User interface	Touchscreen monochrom display, 24 programmable OneTouch functions (quick access to postal products).
Scales / Tariff calculation	Online tariff service and downloads, scales 2 kg / 5 kg integrated, space-saving acrylic scale stand, separate interface for 30 kg scales (option), stack weighing mode or single item weighing mode (2 different weighing modes), tariff module with quick access to other postal products.
Advertising	Ink-jet printing technology with HQ high quality printing mode (600 dpi), linking of ad-slogans to accounts, 3 pre-programmed standard slogans (messages), 5 customer-specific ad-slogans (option), 3 self-programmable text messages additional to ad-slogans.
Additional prints	PPI (Printed Postage Impression), indicia print with or without flexible date, 1D-Barcode for postal services, incoming mail stamp function with date and time (without postage).
Accounts	10 password protected accounts, expandable up to 50 (option), report print-outs, 1 password protected admin mode.
Interfaces	IP communication technology (LAN, DHCP, Proxy), Ethernet RJ45 network connection, WLAN via WLAN-Bridge (option).
SmartShop	Integrated ordering of consumables online via Touchscreen (option).
Comfort functions	High value warning, automatic date and time change, multi-level energy saving modes with Soft-Off.
Licences / Certificates	FIPS 140-2 Level 3, IPMAR, CE, BSI-Grundschutz.
Noise level	Quiet in operation: LPA 1 m: 53 dB(A).
Mains connection	240 V / 50 Hz, off: 0.44 W, ready to frank: 5.5 W, in Operation: 15 W. Energy Star qualified.

Envelope format specification (mm)

Envelope dimensions:	height:	min:	95 mm
	width:	min:	143 mm
	thickness:	min:	0.1 mm
		max:	10 mm
Processible formats (DIN):		min:	C6 (162 mm x 114 mm)

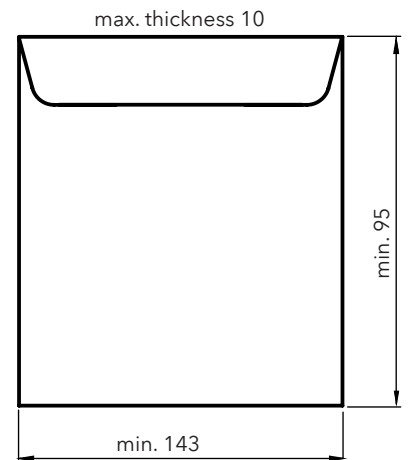

Frama AG Switzerland, 1019319, R02.00 / 09.16
Information provided are subject to change

Dimensions (mm) and weight

Weight 4.3 kg (net)

